



Excellence in Illumination Engineering Software
since 1994



sample banner copyright 2011 Lighting Analysts, Inc.

Photometric Report (Type C)

Filename: FL70150_WAYLIGHT RND 265 EYELID 18W 4K MAINS BLACK.IES
[TEST] 150286
[TESTLAB] Legrand Australia
[ISSUE DATE] 2015-10-07 14:56:38
[MANUFAC] Famco
[LUMCAT] FL70150
[LAMP] WAYLIGHT RND 265 EYELID 18W 4K MAINS BLACK
[BALLAST] Tridonic LCI 20W 350mA TEC C

Maximum Candela = 364.62 at 270 H 25 V


Classification:

Road Classification: Type II, Very Short, Non-Cutoff (deprecated)
Upward Wast Light Ratio: 0.03
Luminaire Efficacy Rating (LER): 51
Indoor Classification: Direct
BUG Rating : B1-U2-G1

Polar Candela Curves:

Vertical Plane Through:
1) 270 - 90 Horizontal

Horizontal Cone Through:
2) 25 Vertical

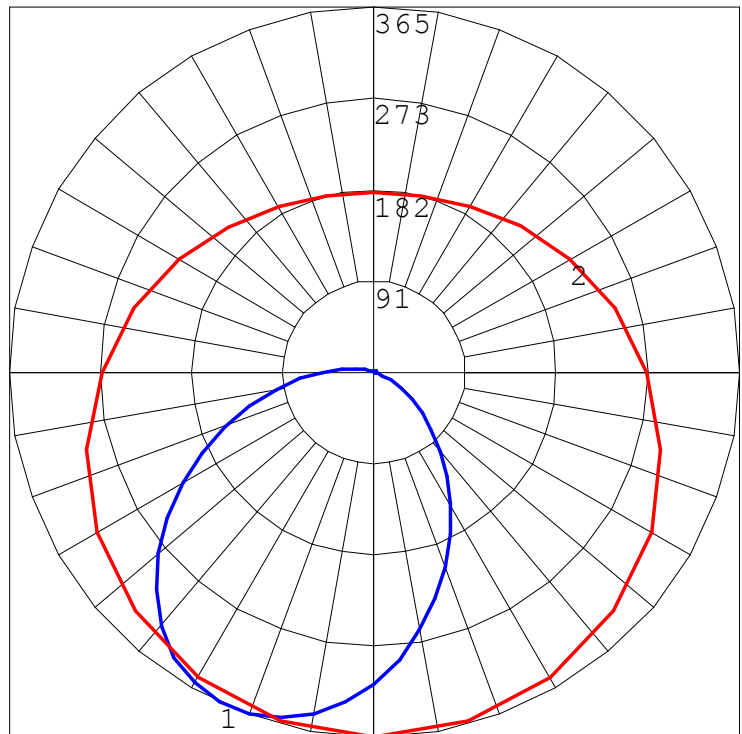



Excellence in Illumination Engineering Software
since 1984



sample banner copyright 2011 Lighting Analysts, Inc.

Photometric Report (Type C)

Filename: FL70150_WAYLIGHT RND 265 EYELID 18W 4K MAINS BLACK.IES
[TEST] 150286
[TESTLAB] Legrand Australia
[ISSUE DATE] 2015-10-07 14:56:38
[MANUFAC] Famco
[LUMCAT] FL70150
[LAMP] WAYLIGHT RND 265 EYELID 18W 4K MAINS BLACK
[BALLAST] Tridonic LCI 20W 350mA TEC C

Maximum Candela = 364.62 at 270 H 25 V

Classification:

Road Classification: Type II, Very Short, Non-Cutoff (deprecated)
Upward Waste Light Ratio: 0.03
Luminaire Efficacy Rating (LER): 51
Indoor Classification: Direct
BUG Rating : B1-U2-G1

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	119.3	13.0	13.0
FM (30-60)	218.1	23.7	23.7
FH (60-80)	88.2	9.6	9.6
FVH (80-90)	20.3	2.2	2.2
BL (0-30)	119.2	13.0	13.0
BM (30-60)	217.5	23.6	23.6
BH (60-80)	88.0	9.6	9.6
BVH (80-90)	20.3	2.2	2.2
UL (90-100)	18.6	2.0	2.0
UH (100-180)	10.8	1.2	1.2
Total	920.3	100.1	100.0
BUG Rating	B1-U2-G1		

