



Photometric Report (Type C)

Filename: FL70370_WAYLIGHT RND 265 PLUSGUARD 18W 4K MAINS BLACK.IES
 [TEST] 150286
 [TESTLAB] Legrand Australia
 [ISSUE DATE] 2015-10-07 14:44:56
 [MANUFAC] Famco
 [LUMCAT] FL70370
 [LAMP] WAYLIGHT RND 265 PLUSGUARD 18W 4K MAINS BLACK
 [BALLAST] Tridonic LCI 20W 350mA TEC C

Maximum Candela = 574.27 at 0 H 0 V


Classification:

Road Classification: Type VS, Very Short, Semi-Cutoff (deprecated)
 Upward Wast Light Ratio: 0.03
 Luminaire Efficacy Rating (LER): 88
 Indoor Classification: Direct
 BUG Rating : B1-U2-G1

Polar Candela Curves:

Vertical Plane Through:
 1) 0 - 180 Horizontal

Horizontal Cone Through:
 2) 0 Vertical

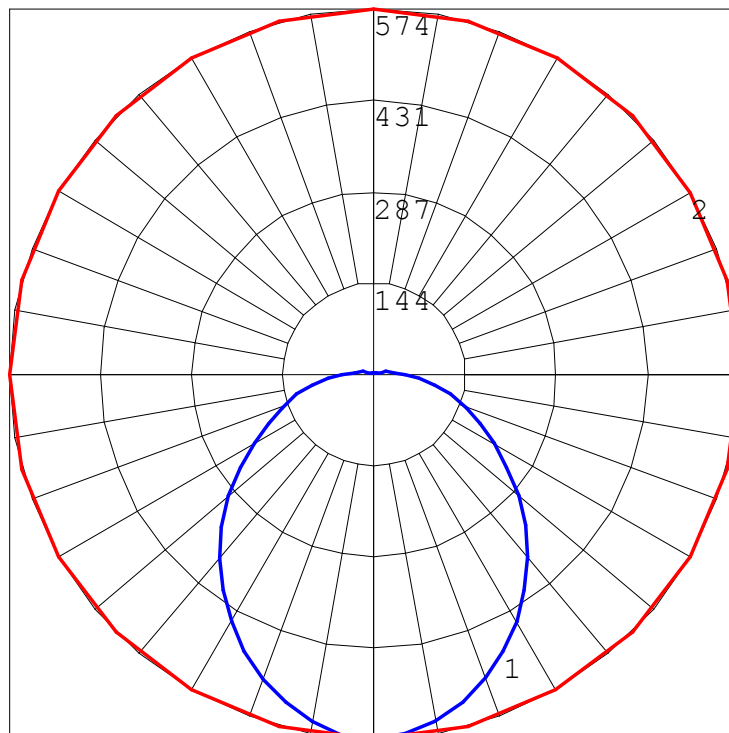



Excellence in Illumination Engineering Software
since 1984



sample banner copyright 2011 Lighting Analysts, Inc.

Photometric Report (Type C)

Filename: FL70370_WAYLIGHT RND 265 PLUSGUARD 18W 4K MAINS BLACK.IES
[TEST] 150286
[TESTLAB] Legrand Australia
[ISSUE DATE] 2015-10-07 14:44:56
[MANUFAC] Famco
[LUMCAT] FL70370
[LAMP] WAYLIGHT RND 265 PLUSGUARD 18W 4K MAINS BLACK
[BALLAST] Tridonic LCI 20W 350mA TEC C

Maximum Candela = 574.27 at 0 H 0 V

Classification:

Road Classification: Type VS, Very Short, Semi-Cutoff (deprecated)
Upward Waste Light Ratio: 0.03
Luminaire Efficacy Rating (LER): 88
Indoor Classification: Direct
BUG Rating : B1-U2-G1

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	212.2	13.4	13.4
FM (30-60)	367.1	23.2	23.2
FH (60-80)	148.3	9.4	9.4
FVH (80-90)	35.8	2.3	2.3
BL (0-30)	212.6	13.4	13.4
BM (30-60)	367.9	23.2	23.2
BH (60-80)	148.8	9.4	9.4
BVH (80-90)	36.2	2.3	2.3
UL (90-100)	33.8	2.1	2.1
UH (100-180)	19.9	1.3	1.3
Total	1582.6	100.0	100.0
BUG Rating	B1-U2-G1		

