



Excellence in Illumination Engineering Software
since 1994



sample banner copyright 2011 Lighting Analysts, Inc.

Photometric Report (Type C)

Filename: FL87460_WAYLIGHT RND 265 LED 18W 4K MAINS BLACK.IES
[TEST] 150286
[TESTLAB] Legrand Australia
[ISSUE DATE] 2015-10-07 14:30:17
[MANUFAC] Famco
[LUMCAT] FL87460
[LAMP] WAYLIGHT RND 265 LED 18W 4K MAINS BLACK
[BALLAST] Tridonic LCI 20W 350mA TEC C

Maximum Candela = 626.14 at 0 H 0 V


Classification:

Road Classification: Type VS, Very Short, Semi-Cutoff (deprecated)
Upward Wast Light Ratio: 0.03
Luminaire Efficacy Rating (LER): 103
Indoor Classification: Direct
BUG Rating : B1-U2-G1

Polar Candela Curves:

Vertical Plane Through:
1) 0 - 180 Horizontal

Horizontal Cone Through:
2) 0 Vertical

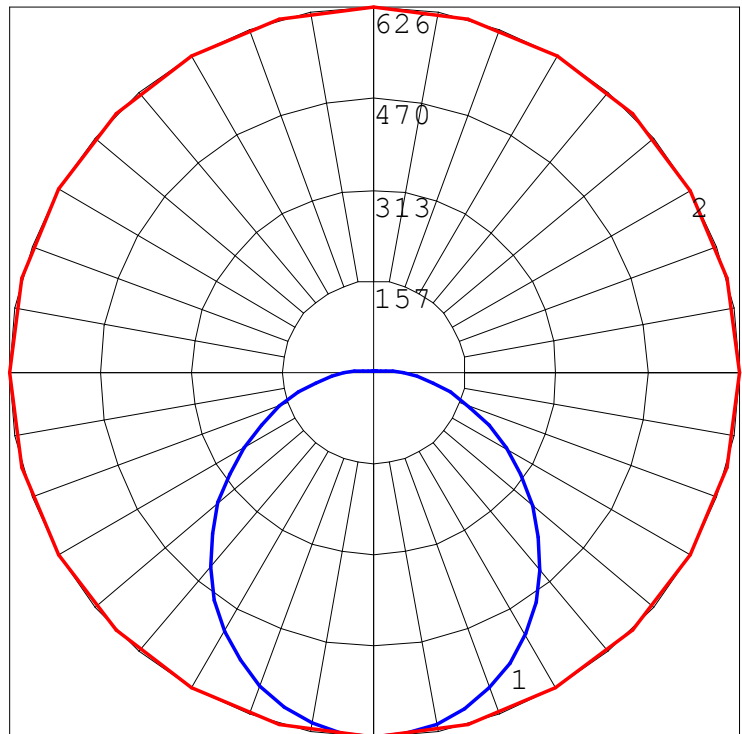



Excellence in Illumination Engineering Software
since 1984



sample banner copyright 2011 Lighting Analysts, Inc.

Photometric Report (Type C)

Filename: FL87460_WAYLIGHT RND 265 LED 18W 4K MAINS BLACK.IES

[TEST] 150286

[TESTLAB] Legrand Australia

[ISSUE DATE] 2015-10-07 14:30:17

[MANUFAC] Famco

[LUMCAT] FL87460

[LAMP] WAYLIGHT RND 265 LED 18W 4K MAINS BLACK

[BALLAST] Tridonic LCI 20W 350mA TEC C

Maximum Candela = 626.14 at 0 H 0 V

Classification:

Road Classification: Type VS, Very Short, Semi-Cutoff (deprecated)

Upward Waste Light Ratio: 0.03

Luminaire Efficacy Rating (LER): 103

Indoor Classification: Direct

BUG Rating : B1-U2-G1

LCS Summary:

LCS Zone	Lumens	%Lamp	%Lum
FL (0-30)	240.6	12.9	12.9
FM (30-60)	442.5	23.8	23.8
FH (60-80)	180.3	9.7	9.7
FVH (80-90)	40.8	2.2	2.2
BL (0-30)	239.4	12.9	12.9
BM (30-60)	437.5	23.5	23.5
BH (60-80)	178.6	9.6	9.6
BVH (80-90)	41.0	2.2	2.2
UL (90-100)	37.1	2.0	2.0
UH (100-180)	21.9	1.2	1.2
Total	1859.7	100.0	100.0
BUG Rating	B1-U2-G1		

